


ALL WINDOW, SIELE AND SCREENS ARE BASED UPON SIMPSON STRONG ARMOR STRONG ARMOR SERIES WINDOWS AS PER MICHG - USE MAXIMUM CLEARANCE DIMENSIONS AT REGULAR WINDOW SIZES

FIRST FLOOR PLAN

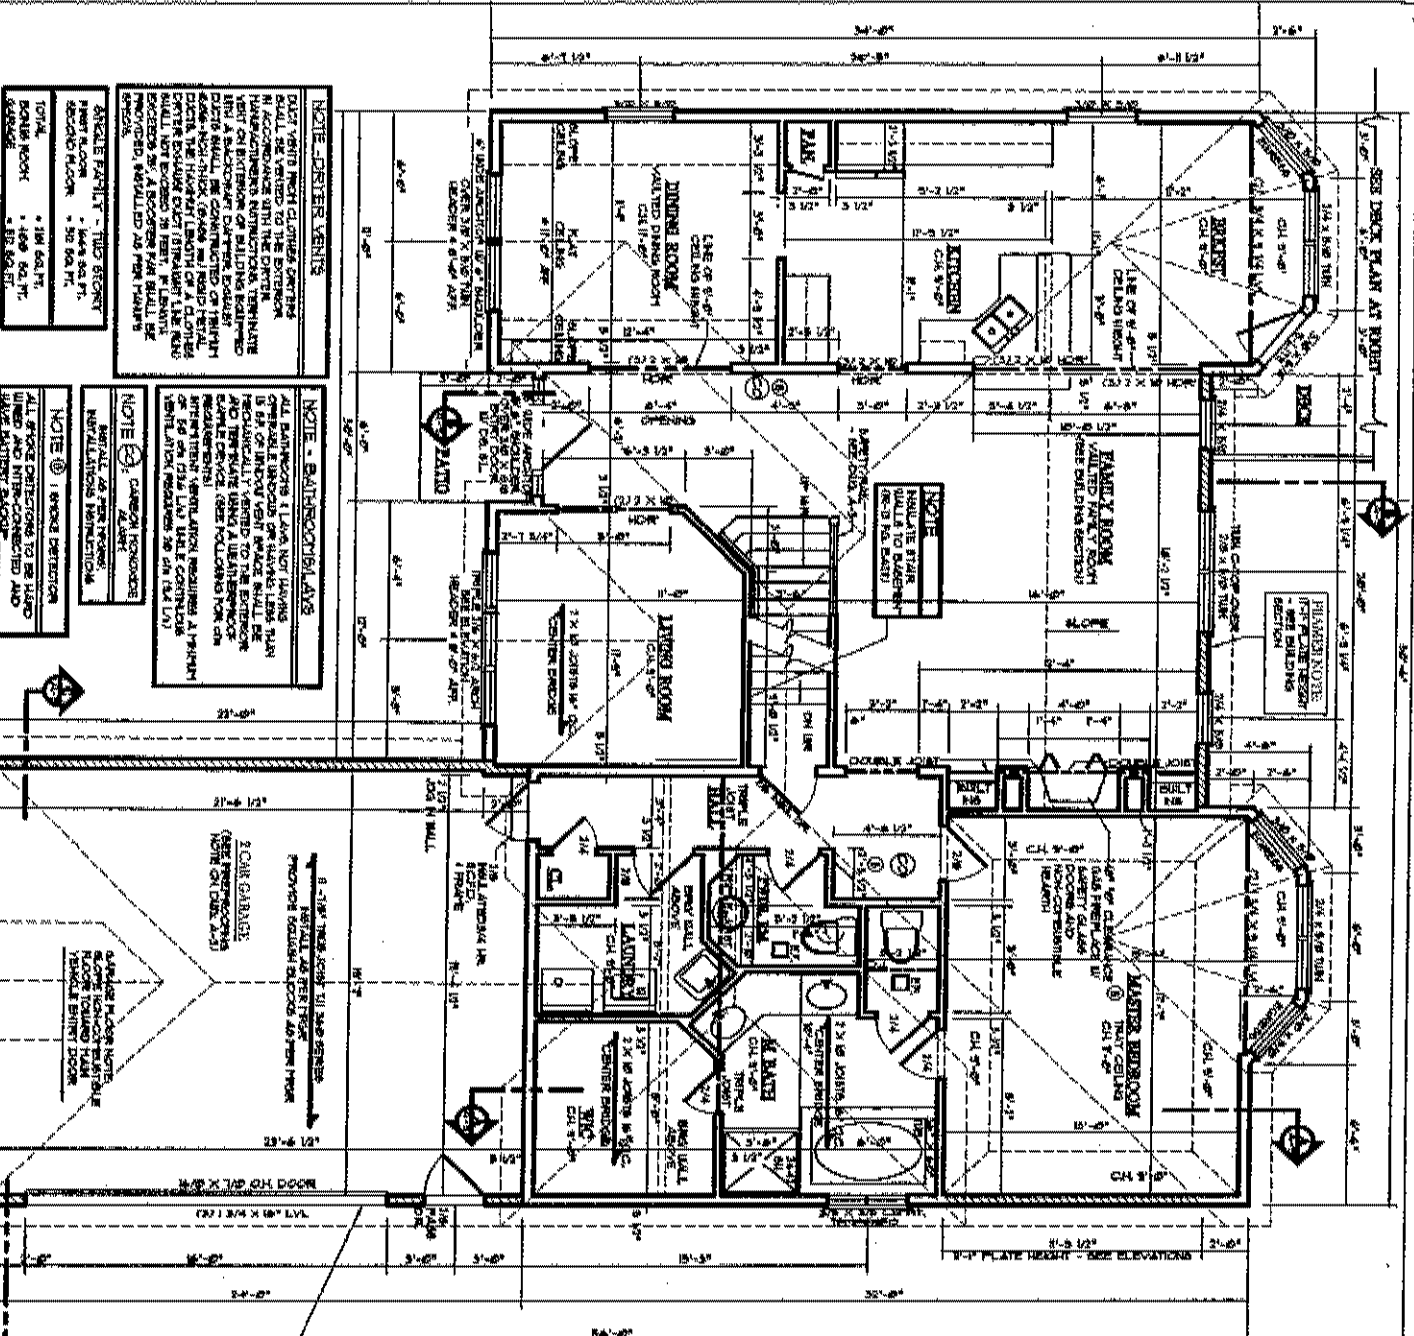


NOTE - EXTERIOR VENTS
 PLANT VENTS FROM CLIMATE CONTROL SHALL BE VENTED TO THE EXTERIOR IN ACCORDANCE WITH THE DRYER MANUFACTURER'S INSTALLATION INSTRUCTIONS. THE EXTERIOR VENT SHALL BE A MINIMUM OF 3" ABOVE THE EXTERIOR FINISH FLOOR. THE EXTERIOR VENT SHALL BE CONSTRUCTED OF THICK GAUGE METAL WITH A MINIMUM OF 1/2" INSULATION. THE EXTERIOR VENT SHALL NOT BE LOCATED IN THE REAR YARD OR OVER A SIDEWALK OR DRIVEWAY. A SCREENED PAN SHALL BE PROVIDED, INSTALLED AS PER MANUFACTURER'S INSTRUCTIONS.

NOTE - BATHROOMS
 ALL BATHROOMS TO HAVE NOT LEAVING 1/2" OF THE BATHROOM TO HAVE 1/2" TURN DOWN TO THE EXTERIOR. THE EXTERIOR VENT SHALL BE CONSTRUCTED OF THICK GAUGE METAL WITH A MINIMUM OF 1/2" INSULATION. THE EXTERIOR VENT SHALL NOT BE LOCATED IN THE REAR YARD OR OVER A SIDEWALK OR DRIVEWAY. A SCREENED PAN SHALL BE PROVIDED, INSTALLED AS PER MANUFACTURER'S INSTRUCTIONS.

NOTE - WINDOW DETECTION
 ALL WINDOW DETECTORS TO BE HARD WIRE WITH A BATTERY BACKUP AND A BATTERY DETECTOR TO BE HARD WIRE WITH A BATTERY BACKUP.

NOTE - WINDOW DETECTION
 ALL WINDOW DETECTORS TO BE HARD WIRE WITH A BATTERY BACKUP AND A BATTERY DETECTOR TO BE HARD WIRE WITH A BATTERY BACKUP.

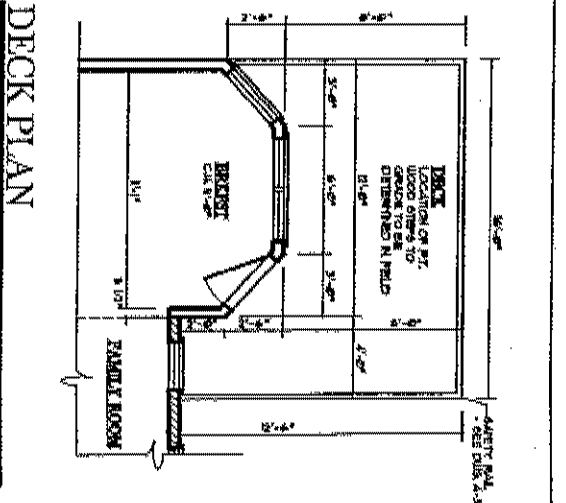

DECK PLAN

SCALE 1/4" = 1'-0"

FRAMER NOTES
 1. ALL FRAMING TO BE 2x6 OR 2x8 UNLESS NOTED OTHERWISE.
 2. ALL FRAMING TO BE TYPICAL FOR THE AREA.
 3. ALL FRAMING TO BE TYPICAL FOR THE AREA.
 4. ALL FRAMING TO BE TYPICAL FOR THE AREA.

Drago Architects
 Design & Planning Consultants
 30 HAWK STREET, SUITE J
 MIDDLETOWN, NY 12549
 (518) 437-0222

DATE	05-01-09
SCALE	AS SHOWN
BY	DRG
CHECKED BY	DRG
DATE	05-01-09
SCALE	AS SHOWN
BY	DRG
CHECKED BY	DRG



